
| FAKRO EN | LST | - | - | - |
|---|---|---|---|---|

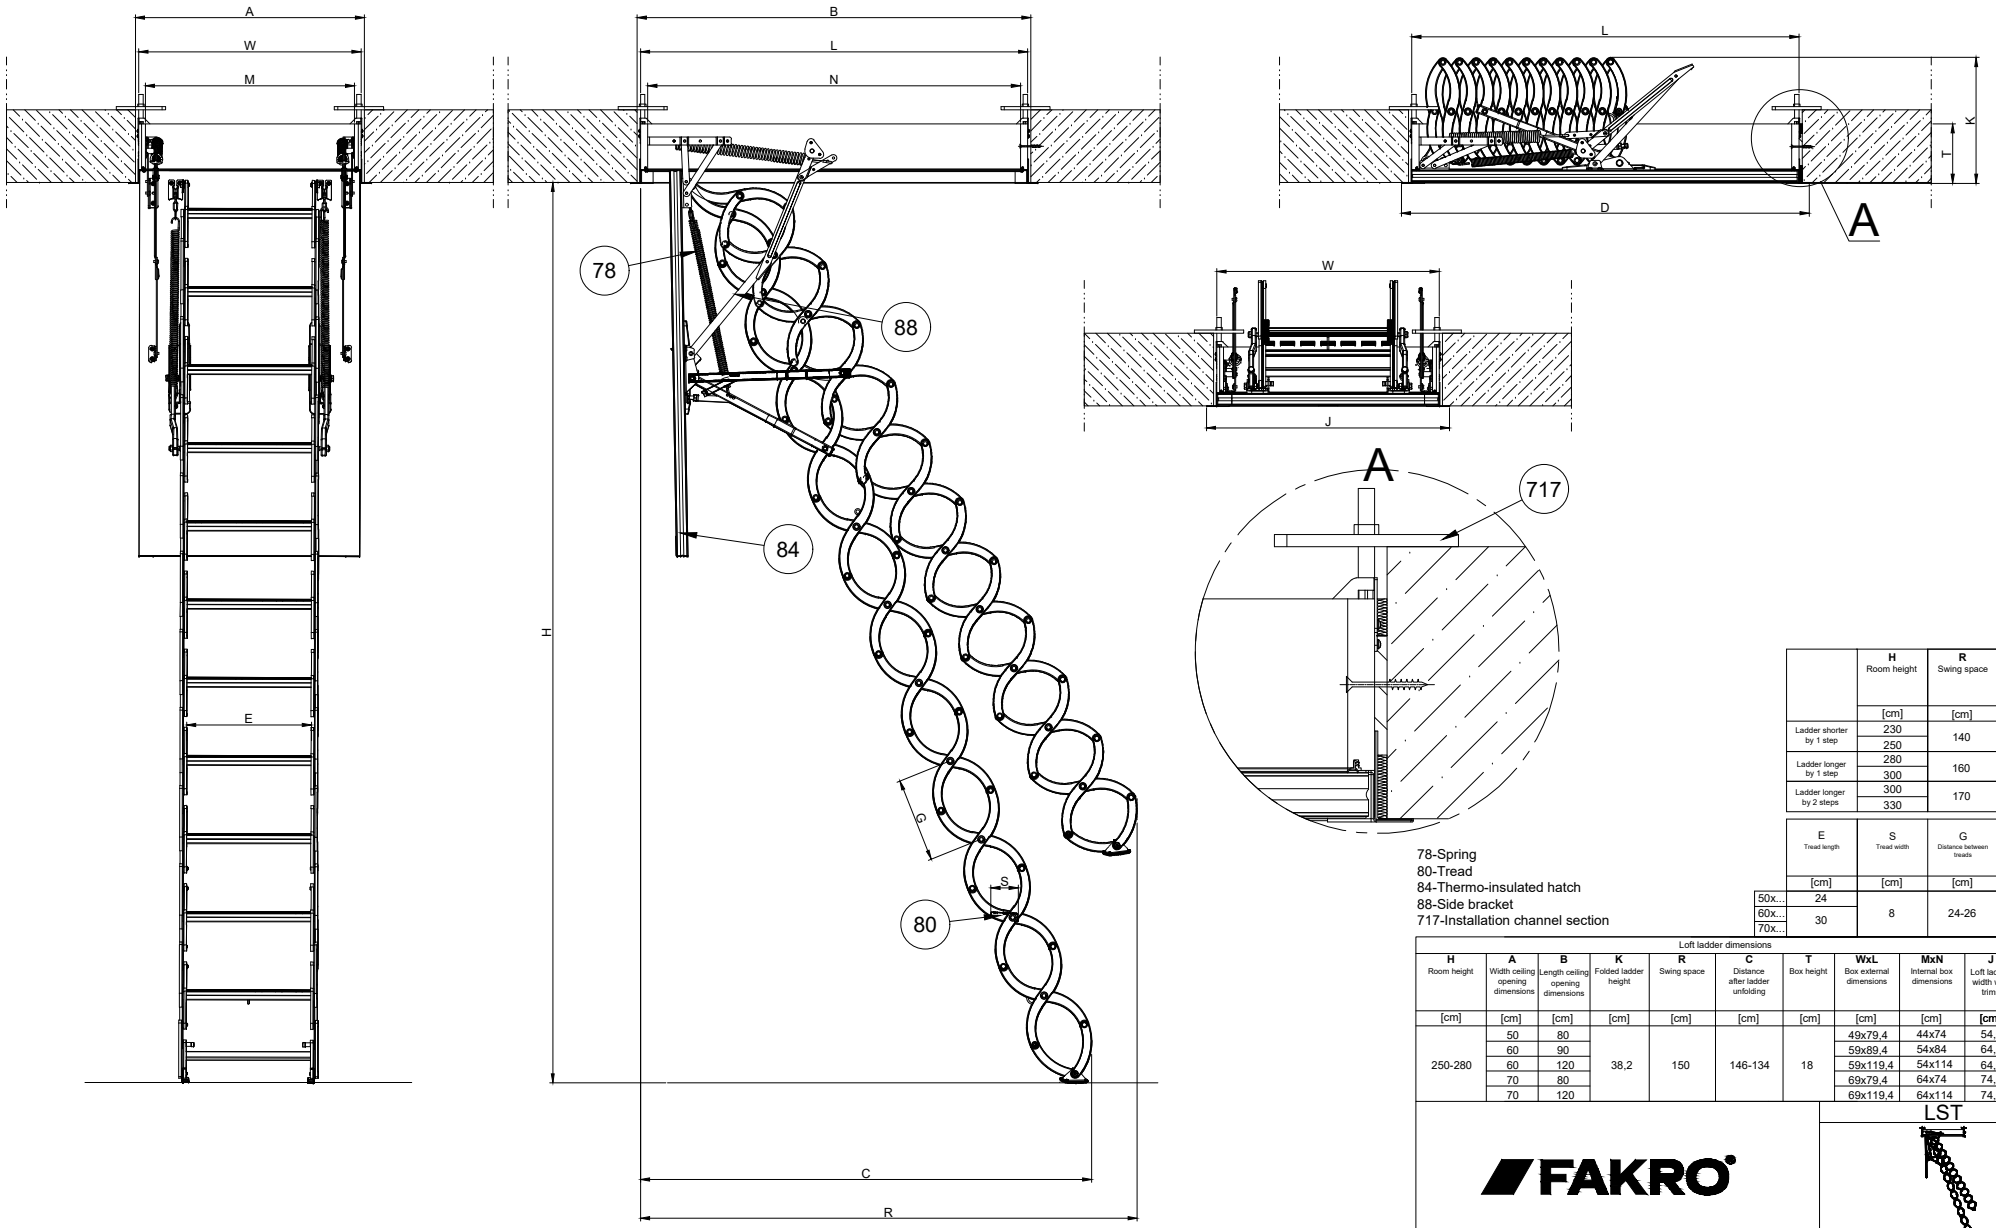


78-Spring
80-Tread
84-Thermo-insulated hatch
88-Side bracket
717-Installation channel section

| | H Room height | R Swing space | C Distance after ladder unfolding |
|---|---|---|---|
| | [cm] | [cm] | [cm] |
| Ladder shorter by 1 step | 230 | 140 | 135 |
| | 250 | | 127 |
| Ladder longer by 1 step | 280 | 160 | 153 |
| | 300 | | 145 |
| Ladder longer by 2 steps | 300 | 170 | 163 |
| | 330 | | 150 |

| | E Tread length | S Tread width | G Distance between treads | Standard number of treads |
|---|---|---|---|---|
| | [cm] | [cm] | [cm] | [pcs.] |
| 50x... | 24 | 8 | 24-26 | 11 |
| 60x... | 30 | | | |
| 70x... | | | | |

Loft ladder dimensions

| H Room height | A Width ceiling opening dimensions | B Length ceiling opening dimensions | K Folded ladder height | R Swing space | C Distance after ladder unfolding | T Box height | WxL Box external dimensions | MxN Internal box dimensions | J Loft ladder width with trims | D Loft ladder length with trims |
|---|---|---|---|---|---|---|---|---|---|---|
| [cm] | [cm] | [cm] | [cm] | [cm] | [cm] | [cm] | [cm] | [cm] | [cm] | [cm] |
| 250-280 | 50 | 80 | 38,2 | 150 | 146-134 | 18 | 49x79,4 | 44x74 | 54,0 | 84,4 |
| | 60 | 90 | | | | | 59x89,4 | 54x84 | 64,0 | 94,4 |
| | 60 | 120 | | | | | 59x119,4 | 54x114 | 64,0 | 124,4 |
| | 70 | 80 | | | | | 69x79,4 | 64x74 | 74,0 | 84,4 |
| | 70 | 120 | | | | | 69x119,4 | 64x114 | 74,0 | 124,4 |

FAKRO

LST



| Technical drawing: The LST Loft Ladder | FORMAT: A4 | SCALE: 1:25 | DATE: 04.2026 |
|---|---|---|---|

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.