



FAKRO EN	LWE Energy Efficient (4s)	-	LXA-PVC	-

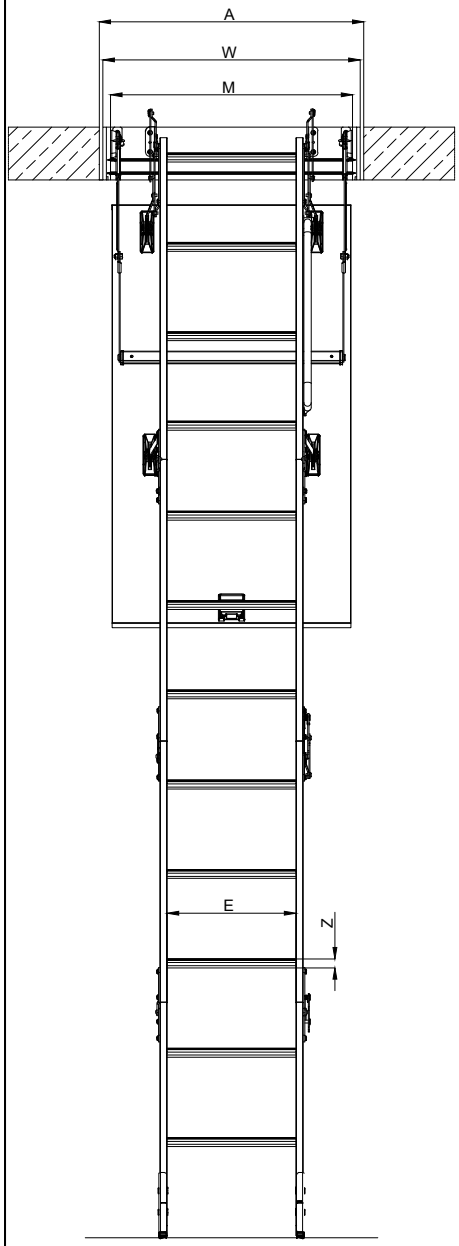

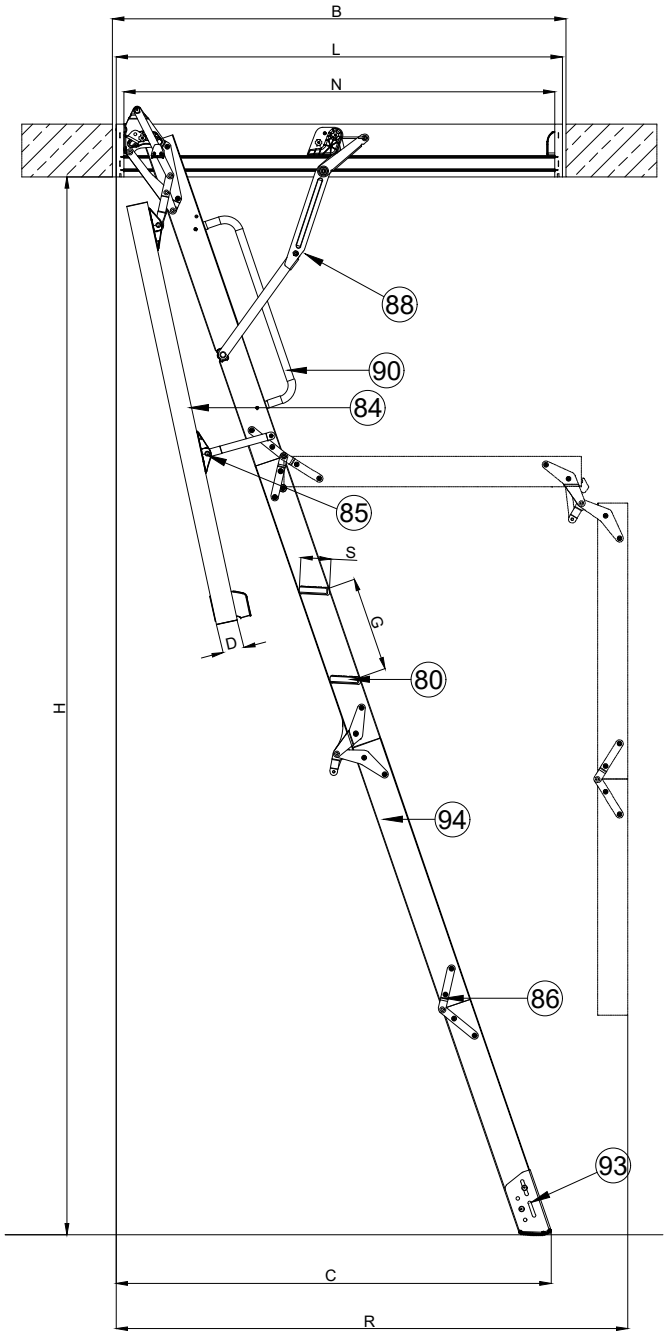

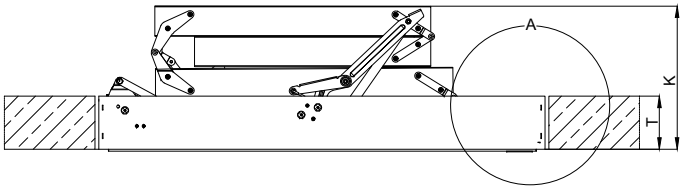

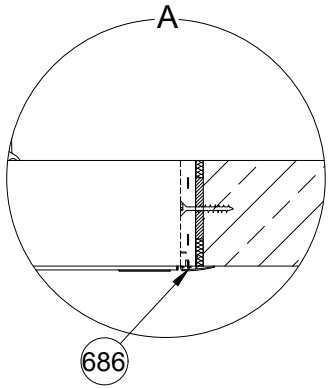

80-Tread
84-Thermo-insulated hatch
85-Ladder bracket
86-Hinge
88-Side bracket
90-handrail
93-stile end
94-Stringer (ladder side element)
686-Architraves LXA-PVC FAKRO

Z Tread thickness	**S** Tread width	**G** Distance between treads	**D** Hatch thickness
[cm]	[cm]	[cm]	[cm]
2	8	25	5,6

LWE Energy Efficient (4s) - Loft ladder dimensions

H Room height	**H** Min. Room height	**A** Width ceiling opening dimensions	**B** Length ceiling opening dimensions	**K** Folded ladder height	**R** Swing space	**C** Distance after ladder unfolding	**E** Tread length	**T** Box height	**WxL** Box external dimensions	**MxN** Internal box dimensions
[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
280	260	55	100	44	137	118	30	14	53x98	49x94
		60	100				34		58x98	54x94
		70	100						68x98	64x94

FAKRO

LWE Energy Efficient (4s)



Technical drawing:
THE LOFT LADDER
LWE Energy Efficient (4s)

FORMAT:	SCALE:	DATE:
A4	1:20/1:10	04.2026

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.