



FAKRO EN	LWE Energy Efficient	-	LXA-PVC	-

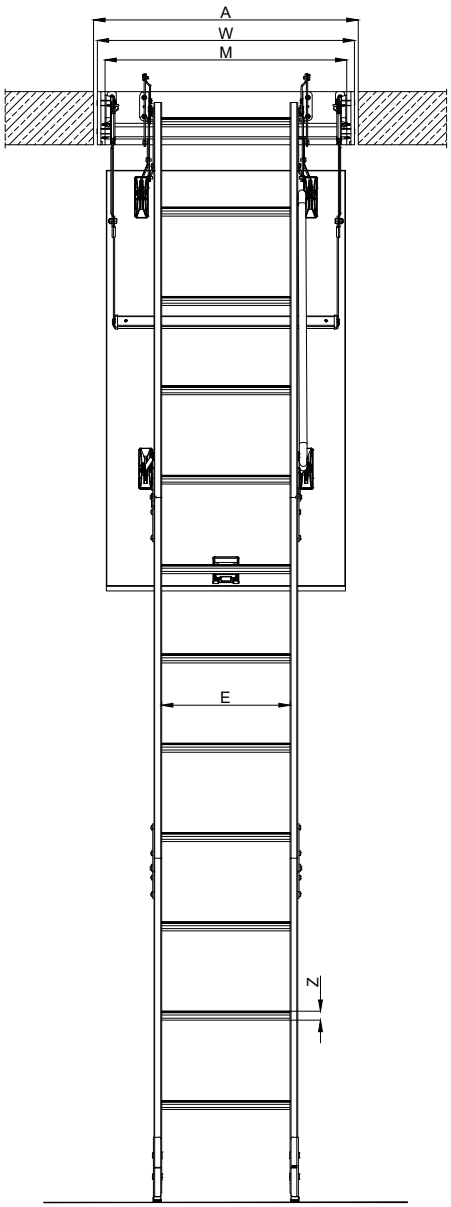

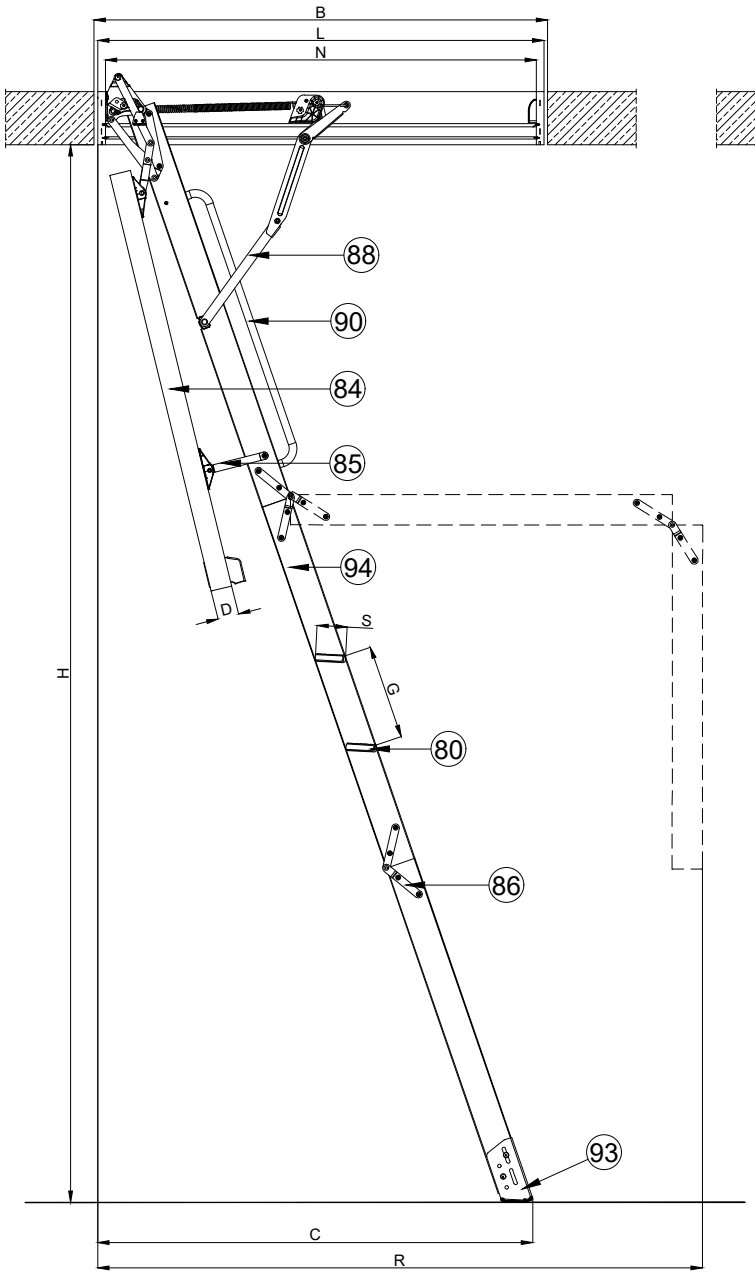

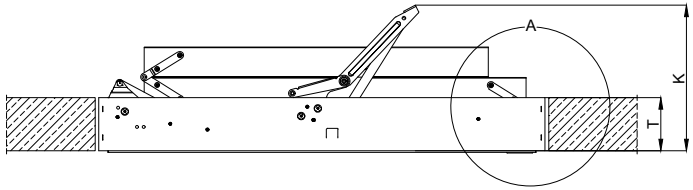

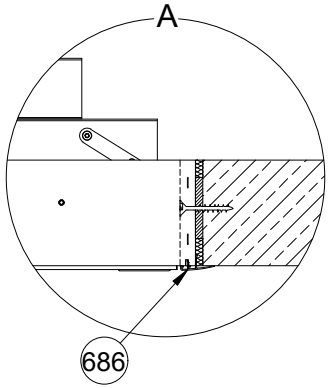

80-Tread
84-Thermo-insulated hatch
85-Ladder bracket
86-Hinge
88-Side bracket
90-handrail
93-stile end
94-Stringer (ladder side element)
686-Architraves LXA-PVC FAKRO


Z Tread thickness	**S** Tread width	**G** Distance between treads	**D** Hatch thickness
[cm]	[cm]	[cm]	[cm]
2	8	25	5,6

LWE Energy Efficient - Loft ladder dimensions

H Room height	**H** Min. Room height	**A** Width ceiling opening dimensions	**B** Length ceiling opening dimensions	**K** Folded ladder height	**R** Swing space	**C** Distance after ladder unfolding	**E** Tread length	**T** Box height	**WxL** Box external dimensions	**MxN** Internal box dimensions
[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
280	237	60	120	43	162	118	34	14	58x118	54x114
		70	120						68x118	64x114
		70	130						68x128	64x124
		70	140						68x138	64x134
		80	120						78x118	74x114
		80	140						78x138	74x134
305	238	60	130		170	127			58x128	54x124
		70	130						68x128	64x124
		70	140						68x138	64x134
		80	140						78x138	74x134

FAKRO

LWE Energy Efficient



Technical drawing:
THE LOFT LADDER
LWE Energy Efficient

FORMAT:	SCALE:	DATE:
A4	1:20/1:10	02.2026

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.