



FAKRO EN	LMF 60 280-305	-	LXL-PVC	-

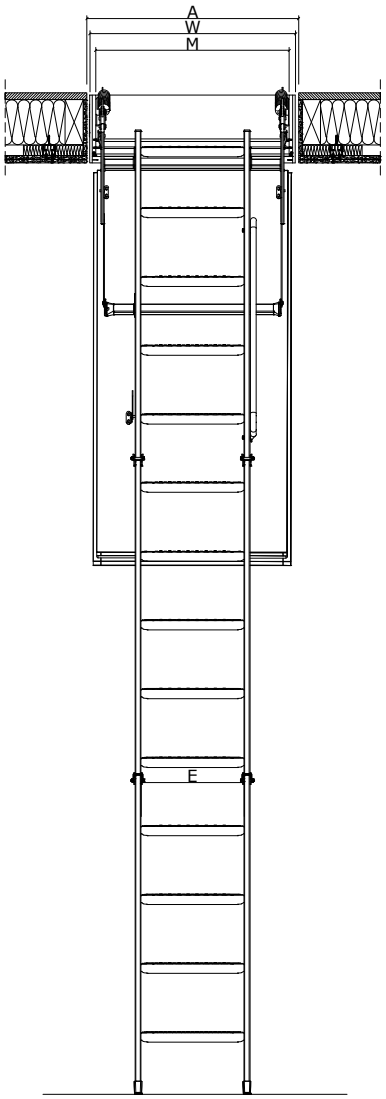

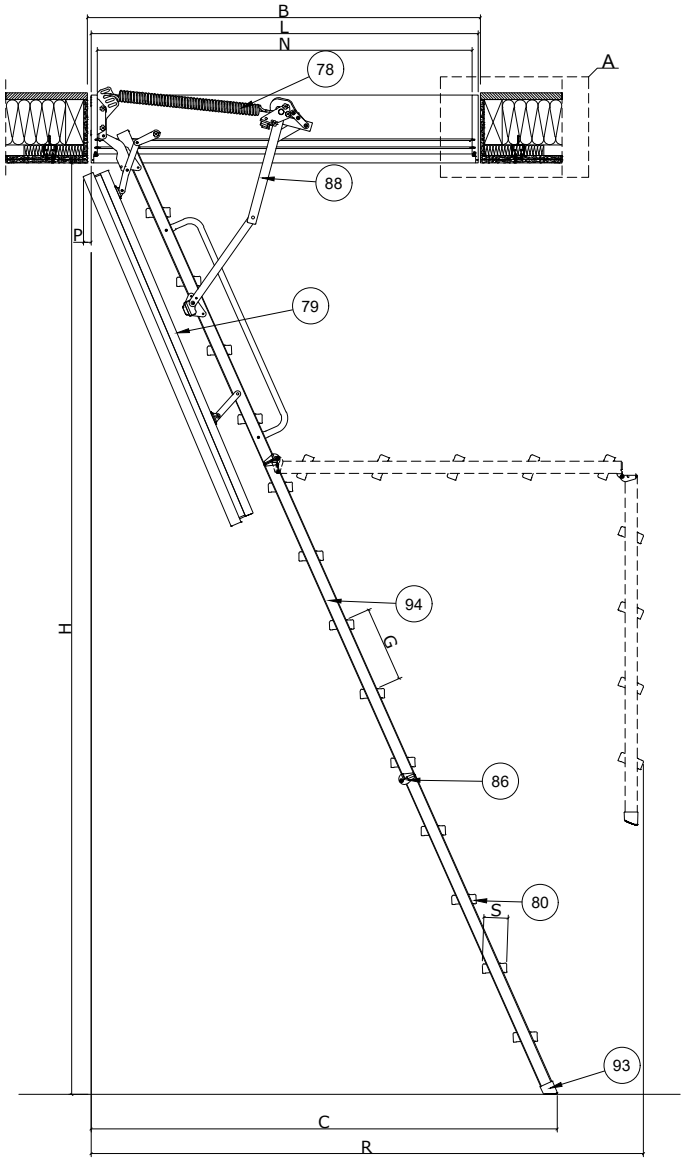

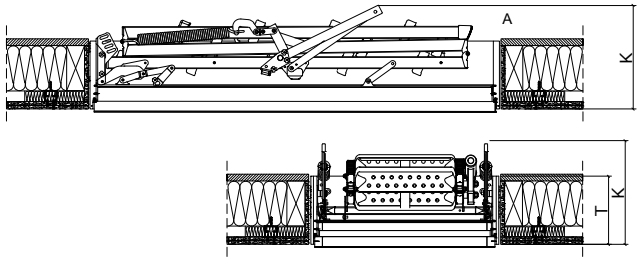

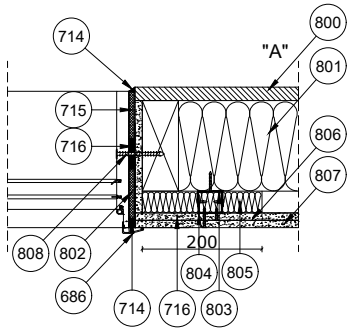

Ceiling structure in accordance with the fire classification

78-Spring
79-Fire-rated hatch
80-Tread
86-Hinge
88-Side bracket
93-Stile end
94-Stringer (ladder side element)
686-Architraves LXL-PVC FAKRO
714-Fire-resistant sealant
715-Rock wool (ρ=60kg/m^3)
716-Spacing wooden washer
800-OSB board 22mm
801-Rock wool 150mm
802-Gypsum board - Nida Ogień + (DF type)
803-Profile hanger type ES
804-Profile type CD
805-Rock wool in free space near specimen
806-Gypsum board - Knauf DFH2
807-Gypsum board - Nida Ogień + (DF type)
808-Screw min. Ø 5x80


P Hatch board movement after opening	**S** Tread width	**E** Tread length
[cm]	[cm]	[cm]
5	8	34

LOFT LADDER LMF 60

H Room height	**H** Min. Room height	**A** Width ceiling opening dimensions	**B** Length ceiling opening dimensions	**K** Folded loft ladder height	**R** Swing space	**C** Distance after ladder unfolding	**T** Box height	**WxL** Outside box dimensions	**MxN** Inside box dimensions	**G** Distance between treads
[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
280	233	60	120	39	156	125	22,5	58x118	54x114	25
		70	120					68x118	64x114	
		70	130					68x128	64x124	
		70	140					68x138	64x134	
		86	130					84x128	80x124	
305	234	70	130		167	135		68x128	64x124	
		70	140					68x138	64x134	
		86	130					84x128	80x124	

FAKRO

LMF60



Technical drawing:
The LMF60 Loft Ladder Height 280-305 cm
WOODEN CEILING

FORMAT:	SCALE:	DATE:
A4	1:25	03.2026

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.