



FAKRO EN	LWF 60 (4s) SL	-	LXL-PVC	-

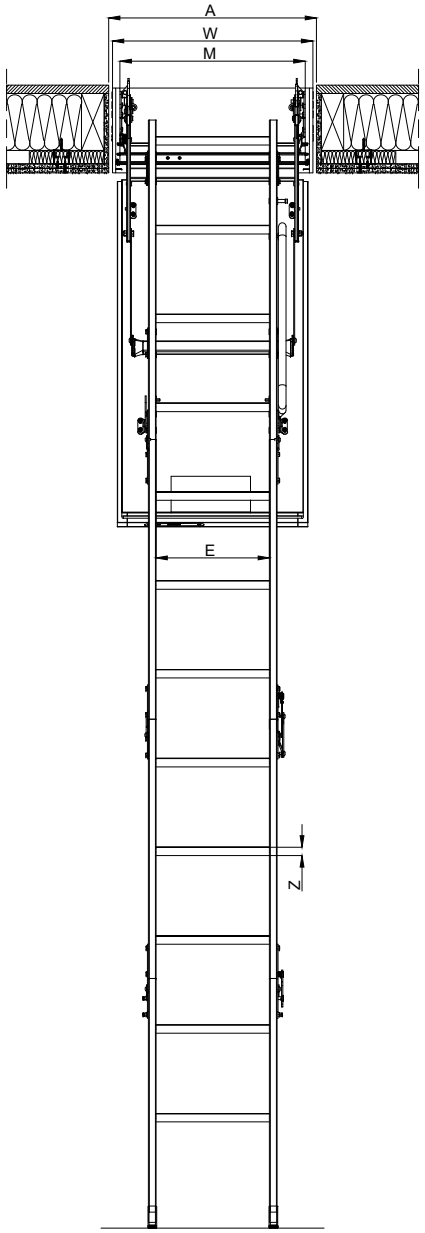

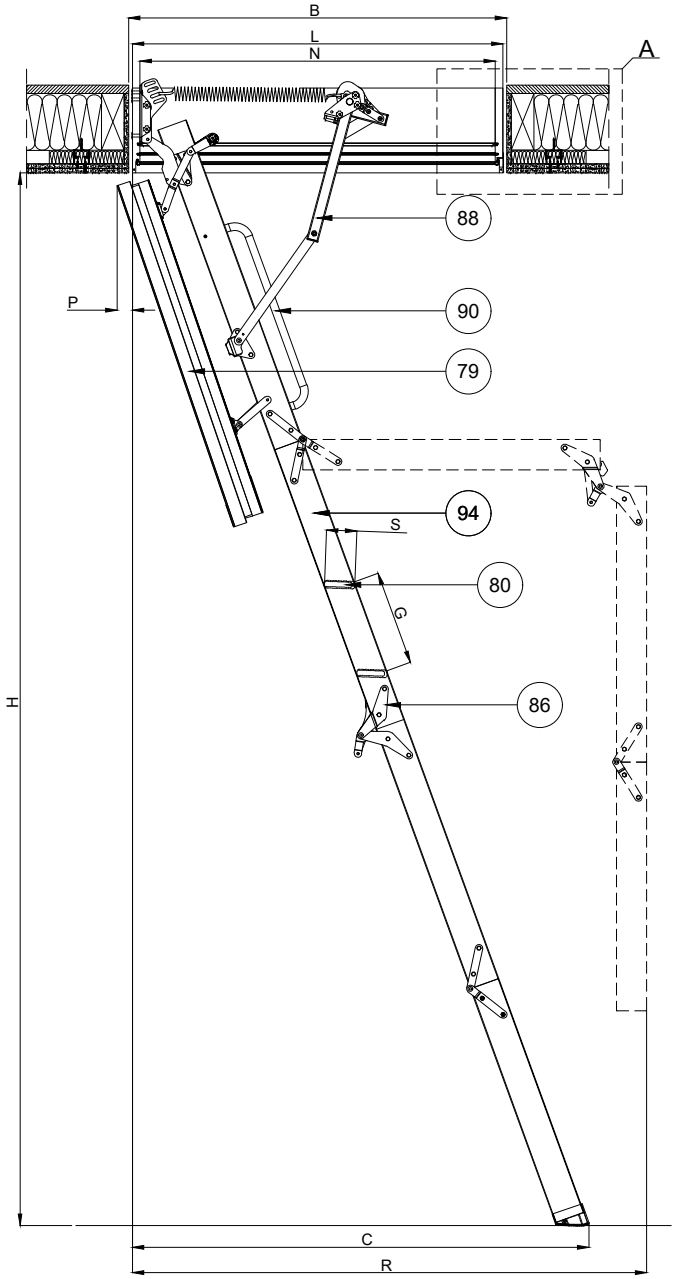

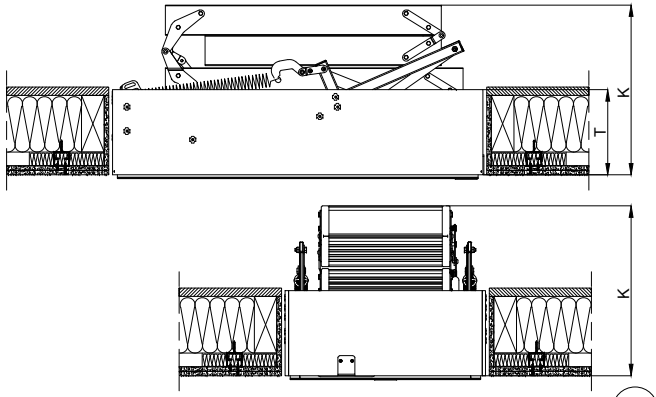

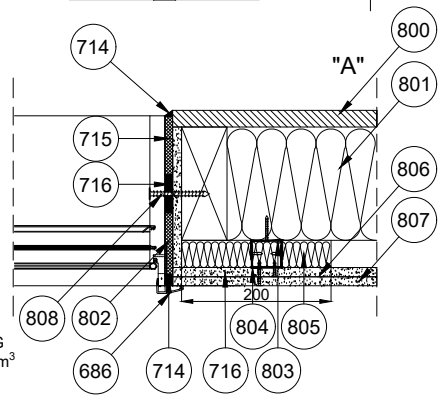

79-Fire-rated hatch
80-Tread
86-Hinge
88-Side bracket
90-LXH handrail
94-Stringer (ladder side element)
686-Finishing lining slats LXL-PVC FAKRO
714-Fire-resistant sealant MERCOR POLYLACK KG
715-Insulation:rock wool with a min.density of 60kg/m^3
716-Spacing wooden washer
800-OSB board 22mm
801-Rock wool 150mm
802-Gypsum board - Nida Ogień + (typu DF)
803-Profile hanger type ES
804-Profile type CD
805-Rock wool in free space near specimen
806-Gypsum board - Knauf DFH2
807-Gypsum board - Nida Ogień + (typu DF)
808-Screw min. Ø 5x80

Ceiling structure in accordance with the fire classification


Size	**P** Hatch board movement after opening	**S** Tread width	**E** Tread length	**Z** Tread thickness
[cm]	[cm]	[cm]	[cm]	[cm]
55x100	5	8	30	2
60x100			34	
70x100			34	

LWF 60 (4-section version) SL - Loft ladder dimensions

H Room height	**H** Min. Room height	**A** Width ceiling opening dimensions	**B** Length ceiling opening dimensions	**K** Folded loft ladder height	**R** Swing space	**C** Distance after ladder unfolding	**T** Box height	**WxL** Outside box dimensions	**MxN** Inside box dimensions	**G** Distance between treads
[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]	[cm]
280	256	55	100	42	139	126	22,5	53x98	49x94	25
		60	100					58x98	54x94	
		70	100					68x98	64x94	

FAKRO

LWF 60 (4s) SL



Technical drawing:
The LWF 60 (4-section version) Loft Ladder SL
WOODEN CEILING

size: 55x100

FORMAT:	SCALE:	DATE:
A4	1:20/1:10	04.2026

Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.